

# LCO7270

## 4G/LTE & Multiband Omni Antenna

### Features

- ◆ Covers 4G, LTE, 3G, GSM & Cellular bands
- ◆ Stud, Connector or Bracket mount
- ◆ Groundplane Independent
- ◆ Wall-Mount version available
- ◆ Suitable for fixed or mobile applications

### Specifications

Radiating element	1/2 Wave Element
Frequency range	690-960/1710-2700 MHz
Gain	2 dBi
Impedance	50 Ohm
Polarisation	Linear
VSWR	< 2.5:1
Power rating	10W
Connector	N-Female (others possible - N-Male, TNC, SMA, RP-SMA)
Materials	ASA Luran Sheath, Aluminium base
Dimensions	159x 34mm (excl. connector)

### Popular Ordering Options

LCO7270-NFB-ST	LCO7270 antenna N-Female BLK Straight connector
LCO7270-NM-ST	LCO7270 antenna N-Male Straight connector
LCO7270-WMB	LCO7270 antenna with Wall-mount L-Bracket N-Female connector

Specifications subject to change without notice.


5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK

Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: sales@ead-ltd.com  
Web: www.ead-ltd.com









## LCO7270 | 4G/LTE & Multiband Omni Antenna

### VSWR

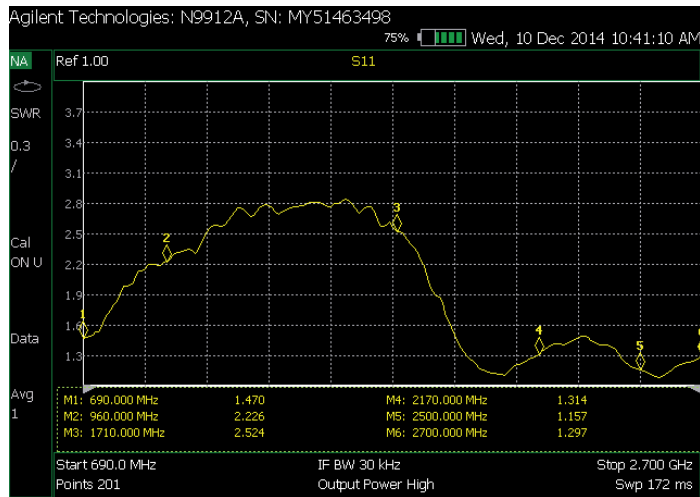

### Radiation Patterns

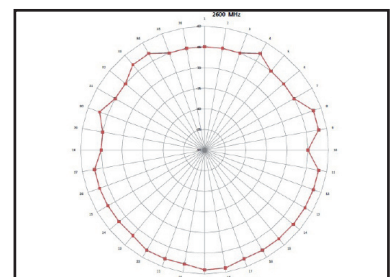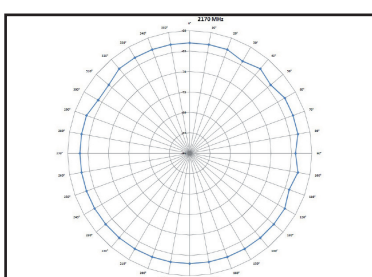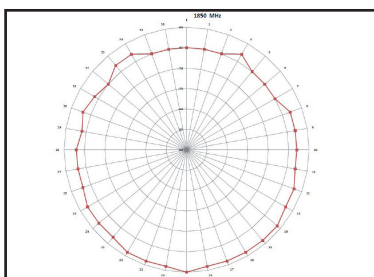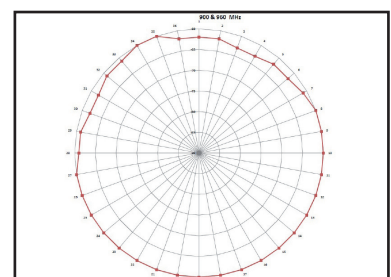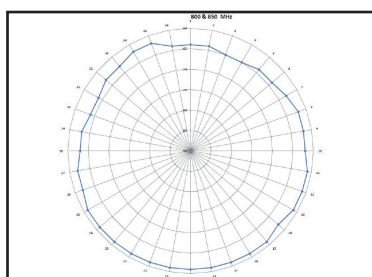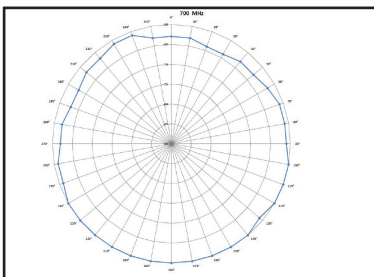

Specifications subject to change without notice.

5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK

Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: sales@ead-ltd.com  
Web: www.ead-ltd.com