

VLP4-4526

450 and 700-2700 MHz Low
Profile Vehicle Antenna

Features

- Low Profile Roof Antenna
- Supports 450 and 700-2700 MHz LTE
- Durable ABS radome
- Groundplane Dependent

Specifications

Specifications	
Radiating element	Groundplane dependent element
Frequency range	450-470 / 690-2170 / 2500-2700 MHz
Peak gain	2 dBi / 2 dBi / 4 dBi
Polarisation	Linear
VSWR	<2:1
Impedance	50 Ohm
Power rating	1W
Cable / Connector	4M RF240 with SMA Connector - customisable
Dimensions	270 x 210 x 49.5mm

Ordering Options

VLP4-4526-4M240-SM	VLP4-4526 antenna with 4M RF240 and SMA-Male
VLP4-4526-5M240-SM	VLP4-4526 antenna with 5M RF240 and SMA-Male


Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK


Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

VLP4-4526 | 450/700-2700 MHz Low Profile Antenna

Outline drawing

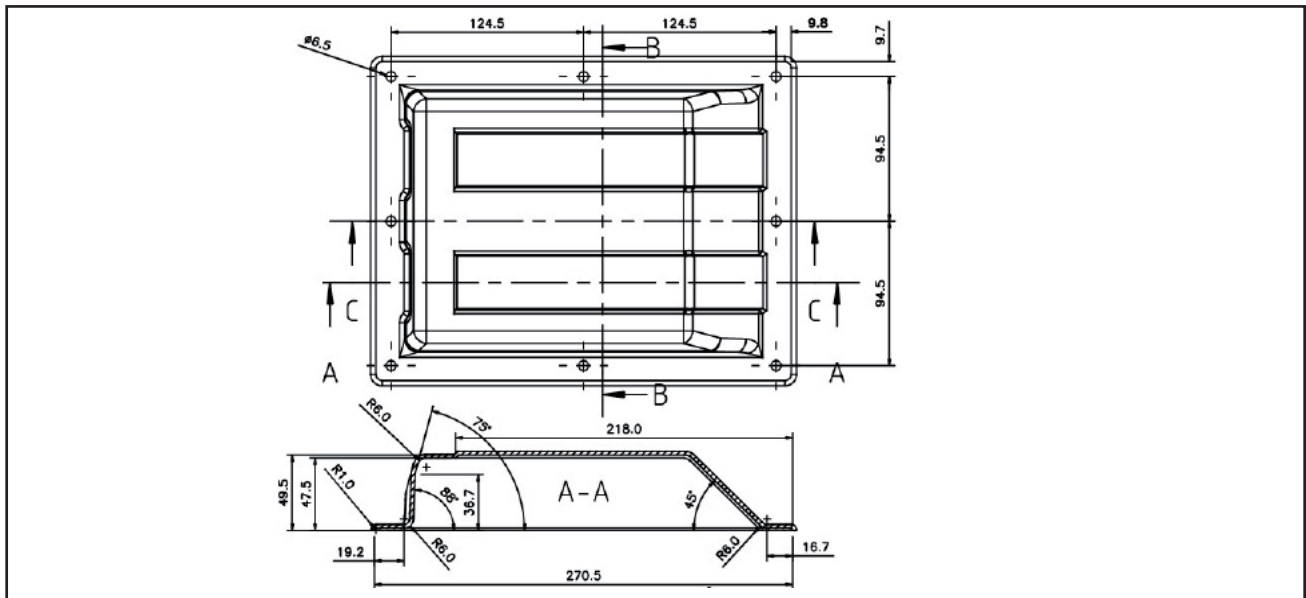

VSWR Plots

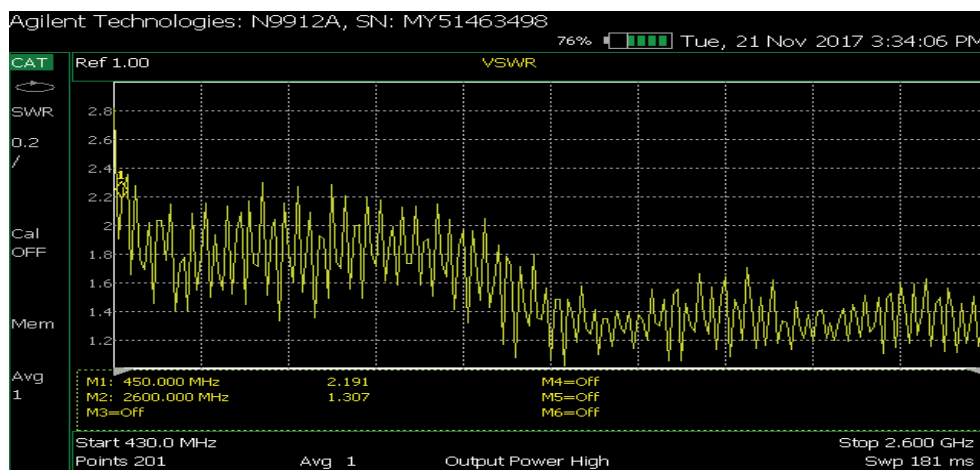

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd
Delivering Antenna Innovation