

V-Flex

2.4 / 5 GHz Flexible PCB Antenna

Features

- ◆ Covers 2.4 and 5 GHz bands
- ◆ Flexible PCB for ease of mounting
- ◆ Double-sided tape mounting
- ◆ Various cable/connector options

Specifications

Frequency range	2.4-2.5 / 4.9-5.9 GHz
Peak Gain	3.0 / 4.2 dBi
Polarisation	Linear
Impedance	50 Ohm
VSWR	<1.6:1
Power rating	1W
Cable / Connector	100mm cable - U.FL, SMA, TS9, CRC, FME
Dimensions	49 x 20 x 0.2mm

Popular Ordering Options

FVFX35353-UF-10	V-Flex antenna with 100mm cable and U.FL
FVFX35353-SM-10	V-Flex antenna with 100mm cable and SMA-Male

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK


Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD 
embedded antenna design ltd
Delivering Antenna Innovation




V-FLEX | 2.4 / 5 GHz Flexible PCB Antenna

VSWR

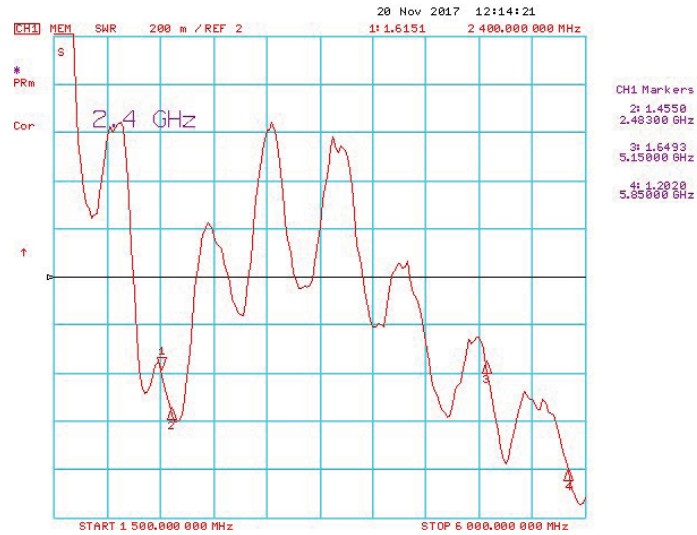

Return Loss

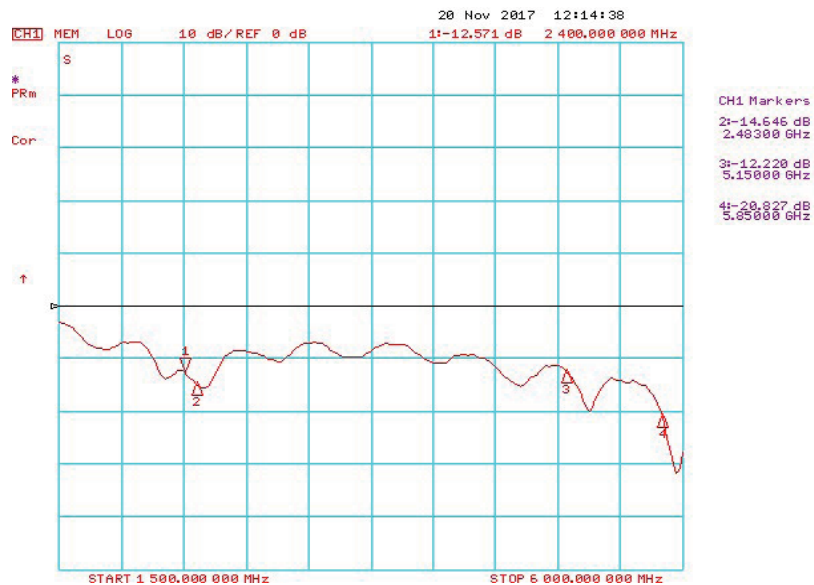

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com